


product description: intended for installation to the distribution of low voltage
 designed for mounting on the floor
 designed for load capacity common in apartments and offices

material: PVC - Pb-free
 self-snuffing: yes, within 30 s
 temperature resistance: -5 - +60 °C
 flaming loop test: 850 °C
 impact strength: 2 J
 protection types: IP30
 fire class for underlying material: A1-F
 inside area: 60+180+60 mm²
 distance base perforation: 200 ±20 mm
 length tolerance: ±10 mm
 weight: 0,28 kg/m
 mechanical protection according to EN 50102: IK07
 certification: EN 50085
 storage: ČSN 64 0090

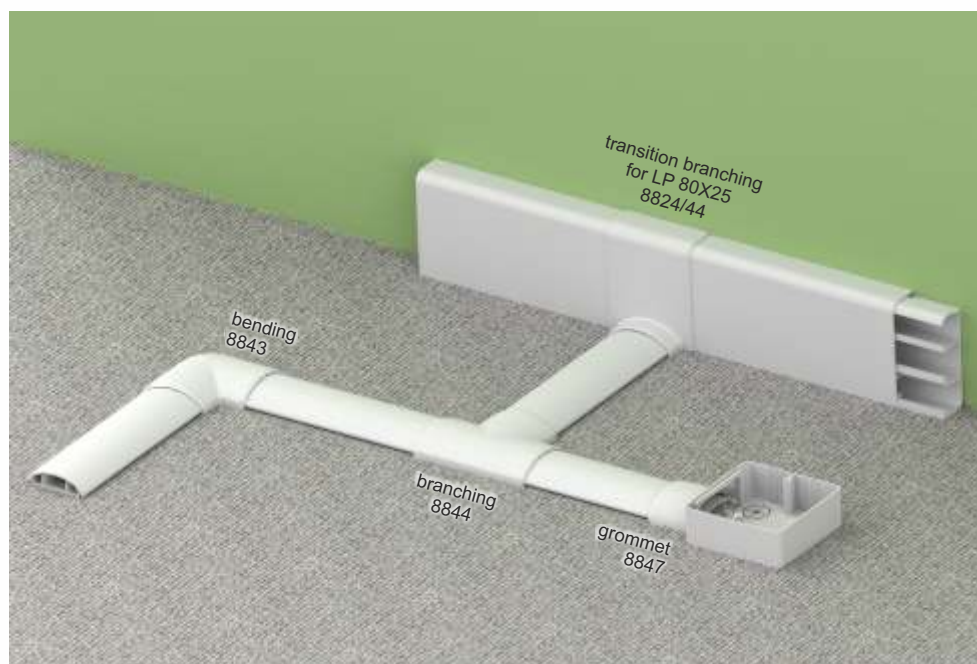

usage of inner trunking cross-section (60%):	orientation cable diameter (mm)	6	7	8
	number of inserted cables	5	2	2

chemical resistance: YES: amoniak 25%, distilled water, ethanol 50%, sodium hydroxide 60%, hydrofluoric acid 40%, acetic acid 5%, sulfuric acid 96%, medicinal oil, methanol, olive oil, petroleum, hydrogen peroxide 20%, transformer oil, sodium carbonate
 NO: aceton, benzen, chlorinated hydrocarbons, tetrachlorocarbon

item number	configuration	length	color	package (m / pc)	package - description	comment
LO 50	HD	2 m	white RAL 9003	32 m	carton	
	P2	2 m	white RAL 9003	32 m	carton	self-adhesive tape
	KD	2 m	light gray	32 m	carton	
	LD	2 m	dark gray	32 m	carton	
	L2	2 m	dark gray	32 m	carton	self-adhesive tape
8843	HB		white RAL 9003	2 / 328 pc	foil / carton	
	KB		light gray	2 / 450 pc	foil / carton	bending
	LB		dark gray	2 / 450 pc	foil / carton	
8844	HB		white RAL 9003	2 / 288 pc	foil / carton	
	KB		light gray	2 / 288 pc	foil / carton	branching
	LB		dark gray	2 / 228 pc	foil / carton	
8824/44	HB		white RAL 9003	10 / 300 pc	foil / carton	transition branching (intended to go to floor trunking LP 80X25)
8847	HB		white RAL 9003	2 / 680 pc	foil / carton	
	KB		light gray	2 / 680 pc	foil / carton	grommet (intended to go to trunking boxes LK 80X28...)
	LB		dark gray	2 / 680 pc	foil / carton	