

hartte XS

models with mechanical unlocking (W)



The Hartte XS series electric strike features small dimensions, a symmetrical design and an adjustable, radial-shaped latch.

Models with mechanical unlocking (W).


Characteristic:

- fail-secure NC (normally closed)
- dimensions: width 16.2 mm, height 67 mm, depth 28 mm
- break-in resistance: 3000 N (ca. 300 kg)
- durability: 200,000 opening cycles
- latch adjustment: 3.5 mm
- DIN left/DIN right
- vertical and horizontal installation
- temp. range -25°C to +50°C

Variants with mechanical unlocking are listed in table below.

Functions available in other electric strikes from the Hartte XS series:

- hold-open function (P)
- door status monitoring (M)
- latch guide (C)
- power surge protection (V)

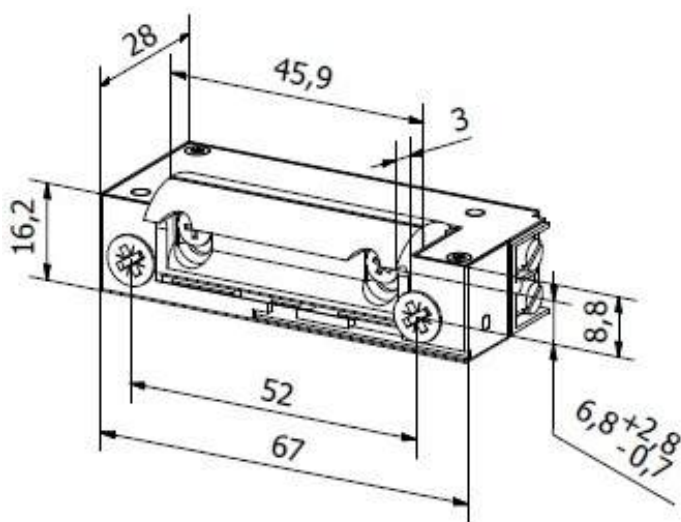

CATEGORY	6V AC/DC	12V AC/DC	24V AC/DC	12-24V AC/DC
Index - model with standard spring - model with middle spring (A) - model with enforced spring (B)	XS06UW XS06UW-A XS06UW-B	XS12UW XS12UW-A XS12UW-B	XS24UW XS24UW-A XS24UW-B	XS00UW XS00UW-A XS00UW-B
Voltage tolerance (V)	AC 7-14 DC 6.5-14	AC 10-14 DC 10-14	AC 21-26 DC 20-26	AC 11-26 DC 11-26
Resistance (Ohm)	10	17.6	60	43
Power consumption AC (mA)	530 at 6AC 1060 at 12AC	480	280	200 at 12AC 390 at 24AC
Power consumption DC (mA)	750 at 6DC 1500 at 12DC	680	400	280 at 12DC 560 at 24DC
Continuously powered (100%ED)	no	no	no	yes, at 12V DC