

DS-2CE12KF3TP-DLS 3K ColorVu Dual-Lens Fixed Bullet Camera



- Dual-lens design, built-in stitching algorithm, presenting a 180-degree image
- High quality imaging with 3K, 3328 × 1504 resolution
- 24/7 color imaging with F1.0 aperture
- Smart-Hybrid light, optimize your security with flexible lighting options
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Up to 40 m white light and 40 m IR distance for bright night imaging
- Built-in mic, high quality audio with audio over coaxial cable
- Water and dust resistant (IP67)

▪ Specification

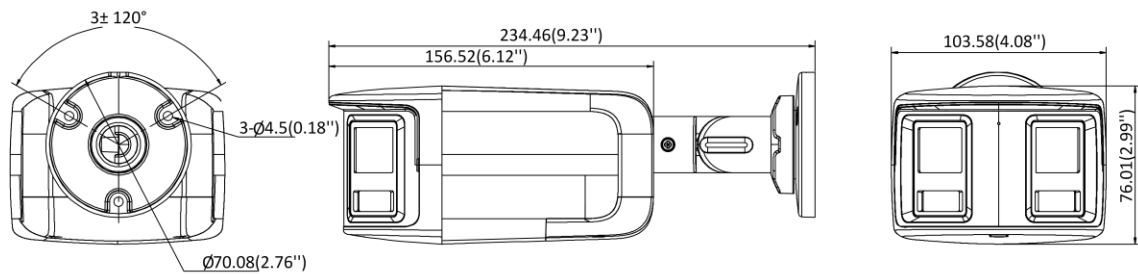
Model		DS-2CE12KF3TP-DLS
Camera	Max. Resolution	3328 (H) × 1504 (V)
	Shutter Time	1/20 s to 1/50,000 s
	Image Sensor	3K CMOS
	Slow Shutter	Max. 16 times
	Min. Illumination	0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light
	Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360°
Lens	Lens Type	2.8 mm fixed focal lens
	Focal Length & FOV	2.8 mm, horizontal FOV: 180°, vertical FOV: 75°
	Lens Mount	M12
DORI	DORI	2.8 mm, D: 44 m, O: 17 m, R: 8 m, I: 4 m
Illuminator	Supplement Light Range	IR: Up to 40 m, White Light: Up to 40 m
	Smart Supplement Light	Yes
Image	Frame Rate	3K @20 dual
	Privacy Mask	4 programmable privacy masks
	Wide Dynamic Range (WDR)	≥130 dB
	Image Parameters Switch	STD/HIGH-SAT/HIGHLIGHT
	Day/Night Mode	Auto
	White Balance	Auto/Manual
	Image Enhancement	WDR,BLC,HLC,Global
	Noise Reduction	3D DNR
	Image Settings	Brightness,Contrast,Smart IR,Sharpness,Anti-Banding,AGC
Interface	Video Output	1 HD analog output
	Built-in Microphone	Yes
Event	Motion Detection	4 programmable motion areas
General	Power	12 VDC ± 25%, max. 7.2 W,*You are recommended to use one power adapter to supply the power for one camera.,If a high-impedance cable is used (such as the 18 m extension cable in the kit package), a 15 VDC adapter is required.

	Language	English
	Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity: 90% or less (non-condensing)
	Material	Front cover: Metal, Main body: Plastic
	Communication	HIKVISION-C
	Dimension	234.46 mm × 103.58 mm × 76.01 mm (9.23" × 4.08" × 2.99")
	Weight	Approx. 630 g (1.39 lb.)
Approval	Protection	IP67

▪ Available Model

DS-2CE12KF3TP-DLS(180°)



▪ Dimension



Unit: mm (inch)

▪ Accessory

▪ Optional

DS-2280ZJ Wall mount	DS-1280ZJ-XS Junction box
	
 DS-2280ZJ	 DS-1280ZJ-XS

See Far, Go Further



www.hikvision.com
support@hikvision.com

