

DS-D5232F2-1V1S
32 inch FHD Monitor

- High reliable components for 7×24 working
- 178° ultra-wideview screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.


▪ Specification

Model		DS-D5232F2-1V1S
Display	Screen Size	32 inch
	Active Display Area	698.4 (H) mm × 392.85 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.12125 (H)mm × 0.36375 (V) mm
	Brightness	350 cd/m ²
	Viewing Angle	178° (H) / 178° (V)
	Color Depth	8 bit
	Contrast Ratio	4000 : 1
	Response Time	8 ms
	Refresh Rate	Typ. 60 Hz
	Haze	Haze 2 %
	Reliability	7 × 24 H
	Color Gamut	72 % NTSC
Interface	Video & Audio Input	CVBS x 1, HDMI1.4 x 1, DVI x 1, VGA x 1, Audio IN x 1
	Video & Audio Output	Speaker(8Ω 2W) × 2, CVBS x 1
	Data Transmission Interface	USB2.0 x 1
	Control Interface	RS232 IN x 1, RS232 OUT x 1
Power	Power Supply	100~240 VAC, 50/60 Hz
	Power Consumption	≤ 80 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0°C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	200 mm × 200 mm (4 - M4 × 10 mm)
	Bezel Width	11.42 mm (top/left/right), 16.98 mm (bottom)
	Product	With base: 723.24 (W) mm × 533.08 (H) mm × 212.14 (D) mm (28.47 (W) inch × 20.99 (H)


	Dimensions (W × H × D)	inch × 8.35 (D)) inch; Without base: 723.24 (W) mm × 423.16 (H) mm × 52 (D) mm (28.47 (W) inch × 16.66 (H) inch × 2.05 (D) inch)
	Package Dimensions (W × H × D)	893 (W) mm × 539 (H) mm × 148 (D) mm
	Net Weight	6.15 ± 0.5 kg
	Gross Weight	8.65 kg ± 0.5 kg
	Packing List	Monitor × 1, Power Cord (1.8m) × 1, Base component × 1, User manual × 1, Multilingual manual × 1, remote control × 1, Screws in 1 Package, Double-end Studs in 1 Package
	Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ Physical Interface

Interface	Description	Interface	Description
BNC IN	BNC (CVBS) signal input interface	BNC OUT	BNC (CVBS) signal output interface
HDMI IN	HDMI 1.4 digital signal input interface	DVI IN	DVI signal input interface
VGA IN	VGA analog signal input interface	AUDIO IN	3.5mm audio in input interface
USB	USB 2.0 Interface (support program upgrade and USB playback)	RS 232 IN	RS 232 IN Serial input interface
RS 232 OUT	RS 232 OUT Serial loopback output interface	POWER	Power supply indicator



▪ Dimension

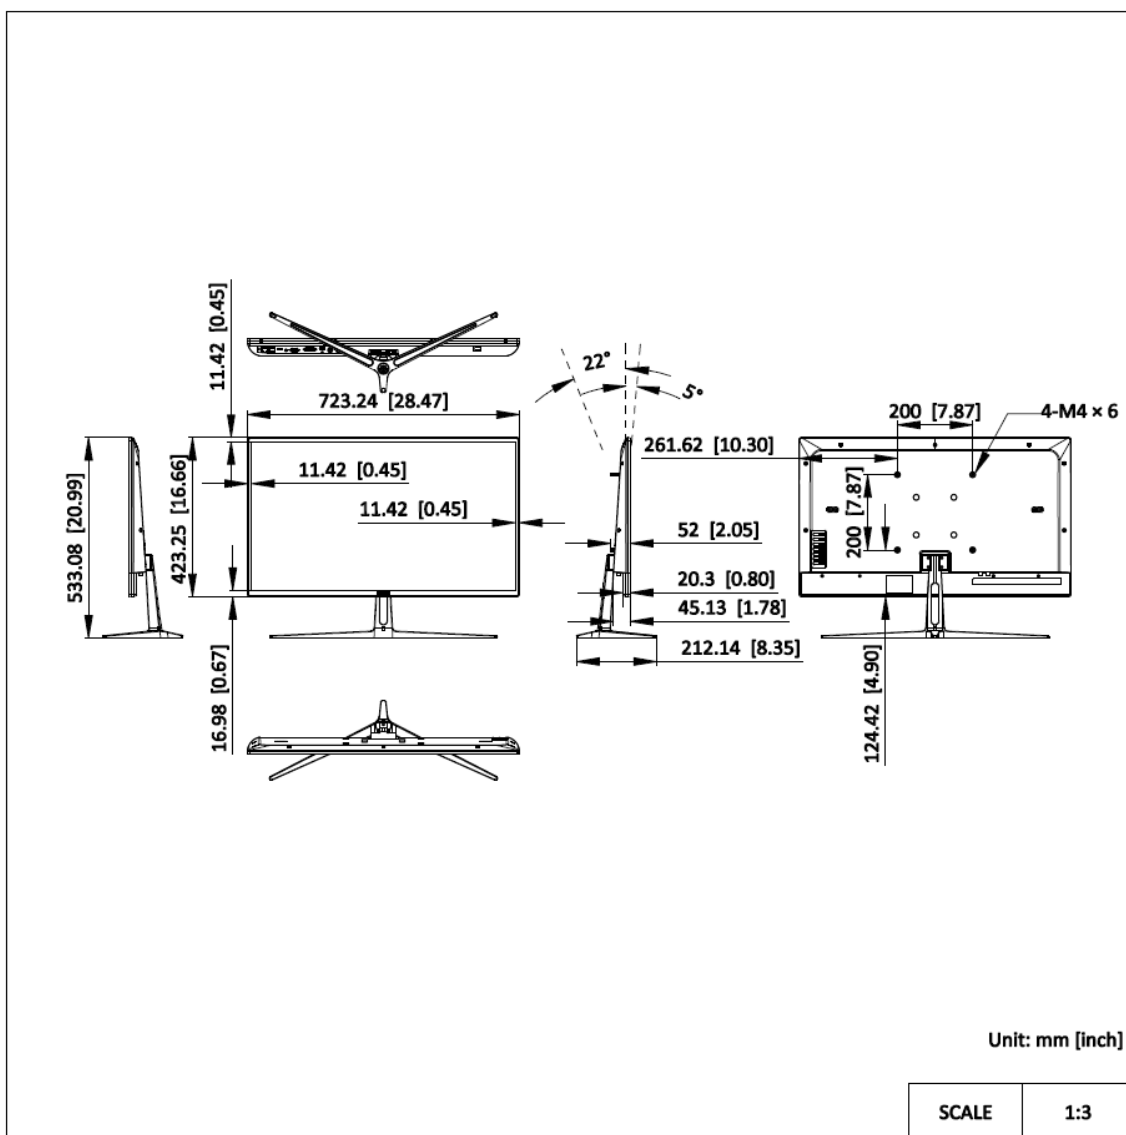

- Accessory
- Optional

DP-D501940-1X1-Q
1-NW-Q0.1-TY/V20
0
DP-D501940 Wall
mount for Monitor
19''- 40''

DS-DM1940W
Wall-mounted
Bracket



See Far, Go Further



www.hikvision.com
support@hikvision.com

