

DS-QAE0206G1-V Analog Ceiling Speaker 6W



- 5.25" × 1"
- Rated Power: 6 W
- Sensitivity(1 m, 1 W): 91 dB ± 3 dB
- Max. SPL: 98 dB
- Frequency Response: 90 Hz to 20 kHz
- White

▪ Specification



Speaker	
Impedance	8 Ω
Speaker Unit	5.25" $\times$ 1
Coverage Angle	Conical Coverage: 95°
Audio	
Rated Power	6 W
Sensitivity	91 dB $\pm$ 3 dB
Max. Acoustic Pressure	98 dB
Frequency Response	90 Hz to 20 kHz
Interface	
Audio In	Rated voltage , 100 V
General	
Material	Shell: ABS; Mesh enclosure: iron mesh
Operating Condition	-20 $^{\circ}$ C~50 $^{\circ}$ C (-4 $^{\circ}$ F to 122 $^{\circ}$ F), humidity: 95% or less
Dimension	$\varnothing$ 170 $\times$ 64 mm ($\varnothing$ 6.69" $\times$ 2.52")
Package Dimension	173.5 $\times$ 173.5 $\times$ 67 mm (6.83" $\times$ 6.83" $\times$ 2.64")
Weight	Approx. 468.5 g (1.03 lb.)
With Package Weight	Approx. 534 g (1.18 lb.)
Packing List	Device $\times$ 1 Regulatory Compliance and Safety Information $\times$ 1
Mounting Hole Dimension	$\varnothing$ 148 mm ($\varnothing$ 5.83")

**The device should be used together with amplifier.*

▪ Available Model

DS-QAE0206G1-V

▪ Dimension

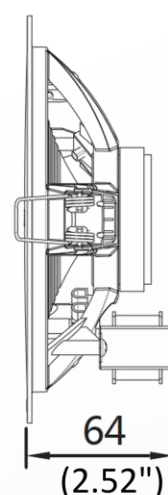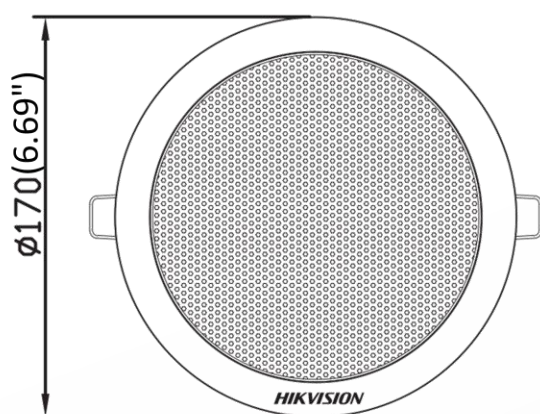

Unit: mm(inch)

See Far, Go Further



www.hikvision.com
support@hikvision.com

